

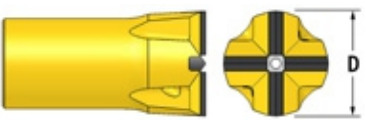



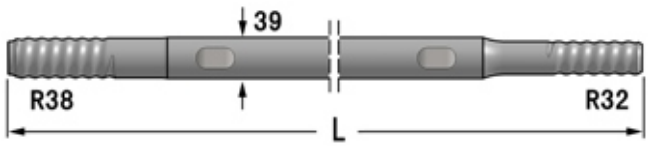

Furnace Tapping Tools 高炉开口钎具

Furnace Tapping Tools 高炉开口钎具



高炉用钎具 Rock Tools For Furnace

钻头 Drill Bit	钎头直径 Diameter		合金 Tip size(mm)	螺纹 Thread	重量 Weight approx kg	Stingray P/N
	毫米 mm	英寸 inch	高×厚 H×W			
十字型钎头 Cross-type bit  	45	1 3/4	7×8	R32	0.5	1222-45R32-7/8-40-24
	50	1 31/32	7×8	R32	0.6	1222-50R32-7/8-40-24
	55	2 1/8	7×8	R32	0.6	1222-55R32-7/8-40-24
	55	2 1/8	7×8	R38	0.7	1222-55R38-7/8-40-24
	55	2 1/8	7×8	T38	1.0	1222-55T38-7/8-40-24
	60	2 3/8	7×8	R32	0.7	1222-60R32-7/8-40-24
	60	2 3/8	7×8	R38	1.2	1222-60R38-7/8-40-24
	60	2 3/8	7×8	T38	1.3	1222-60T38-7/8-40-24
	65	2 1/2	7×8	R32	0.9	1222-65R32-7/8-40-24
	65	2 1/2	7×8	R38	1.3	1222-65R38-7/8-40-24
	65	2 1/2	7×8	T38	1.4	1222-65T38-7/8-40-24
	70	2 3/4	7×8	R32	1.3	1222-70R32-7/8-40-24
	70	2 3/4	7×8	T38	1.5	1222-70T38-7/8-40-24
	80	3 1/8	7×8	R32	1.7	1222-80R32-7/8-40-24
	100	3 3/4	7×8	R32	1.8	1222-100R32-7/8-40-24
柱齿形钎头 Button bit 	48	1 7/8	6×10	R32	0.6	1431-48R32-6/10-42-53
	51	2	6×10	R32	0.7	1431-51R32-6/10-42-53
	54	2 1/8	6×11	R32	0.7	1431-54R32-6/11-42-53
	57	2 1/4	6×11	R32	0.8	1431-57R32-6/11-42-53

钎杆 Drill Rod	长度 Length		重量 Weight (kg)	Stingray P/N
	毫米 mm	英尺 Foot		
R38-Round39-R32 	2800	9'2"	22.7	25R39-R32/R38-2800-40
	3400	11'2"	27.8	25R39-R32/R38-3400-40
	3600	11'9"	29.4	25R39-R32/R38-3600-40
	4100	13'5"	34.5	25R39-R32/R38-4100-40
	4300	14'1"	35.3	25R39-R32/R38-4300-40
T38-Round39-T38 	3000	9'8"	24.9	25R39-T38-3000-40
	3200	10'5"	26.5	25R39-T38-3200-40
	4000	13'1"	33.4	25R39-T38-4000-40